

Reliable Iterative Condition-Number Estimation

Haim Avron
IBM Research

Alex Druinsky
Tel Aviv University

Sivan Toledo
Tel Aviv University

January 8, 2013

Abstract

We describe a reliable Krylov-subspace method for estimating the spectral condition number of a matrix A . The main difficulty in estimating the condition number is the estimation of the smallest singular value $\sigma_{\min}$ of A . Our method estimates this value by solving a consistent least-squares minimization problem with a known minimizer using a specific Krylov-subspace method called LSQR. In this method, the forward error tends to concentrate in the direction of a singular vector corresponding to $\sigma_{\min}$. Extensive experiments show that the method is extremely reliable. It is often much faster than a dense SVD and it can sometimes estimate the condition number when running a dense SVD would be impractical due to the computational cost or the memory requirements. The method uses very little memory (it inherits this property from LSQR) and it works equally well on square and rectangular matrices.

1 Introduction

Estimating the smallest singular value $\sigma_{\min}$ of a matrix is difficult. Dense SVD algorithms can approximate $\sigma_{\min}$ well and their running time is predictable, but they are also slow. Furthermore, dense SVD algorithms require space that is proportional to mn when the matrix is m -by- n , which is impractical for large sparse matrices.

Symmetrization is not an effective way to address the problem. If we work with the Gram matrix A^*A , we cannot estimate condition numbers $\kappa(A) = \sigma_{\max}/\sigma_{\min}$ greater than $1/\sqrt{\epsilon_{\text{machine}}}$, where $\epsilon_{\text{machine}}$ is the unit roundoff (machine precision). If we work with the augmented matrix

$$\begin{bmatrix} 0 & A^* \\ A & 0 \end{bmatrix},$$

$\sigma_{\min}(A)$ is transformed into a pair of eigenvalues $\pm\sigma_{\min}$ in the middle of the spectrum. Such eigenvalues are difficult to compute accurately with Lanczos and its variants¹, and it is essentially impossible for such algorithms to determine that there is no eigenvalue closer to zero than the one that has already been computed.

¹For example, the ARPACK User's Guide states that a shift-invert iteration is usually required to compute eigenvalues in the interior of the spectrum [12, Section 3.4]. Experiments with ARPACK on some of the matrices presented later in the paper, whose condition number our method was able to estimate, showed that ARPACK does not converge on them when it tries to compute the smallest-magnitude eigenvalues of the augmented matrix without inversion.

This paper describes a Krylov-subspace method that can estimate $\sigma_{\min}$ and hence the spectral condition number $\sigma_{\max}/\sigma_{\min}$ accurately. Our method is reliable in the sense that it does not incorrectly report significant overestimates of $\sigma_{\min}$ as accurate (at least when A is not close to being rank deficient). Our method is also robust since it requires very little memory.

Our method also has some flaws. The main one is that it sometimes converges very slowly, making it essentially impossible to compute $\sigma_{\min}$. Our experience shows that the method always converges eventually, but that convergence might be too slow to be of practical use. There is no good way to determine how close the method is to termination, although it tends to behave consistently on related matrices (e.g. from the same application area). When $\kappa(A)$ is close to $\epsilon_{\text{machine}}^{-1}$, the method sometimes overestimates $\sigma_{\min}$ by several orders of magnitude, but it still returns a small estimate (smaller than $\sigma_{\max} \times 10^{-11}$ in our experience, with $\epsilon_{\text{machine}} \approx 10^{-16}$).

Even with these flaws, to the best of our knowledge this method is the only practical way to compute $\sigma_{\min}$ with reasonable accuracy (to within a factor of 2 or better) on many large matrices.

The key idea of our method is to apply LSQR, a Krylov-subspace least-squares solver, to minimize $\|Ax - b\|$ (all norms in this paper denote the 2-norm unless stated otherwise) when we already have an x^* that satisfies $Ax^* = b$. Thanks to having x^* , we can compute the forward error, which allows us to exploit the tendency of LSQR to concentrate the forward error in the direction of a singular vector associated with $\sigma_{\min}$. This is often seen as a flaw in LSQR and in Conjugate Gradients (LSQR is mathematically equivalent to Conjugate Gradients applied to $A^T Ax = A^T b$). These solvers converge slowly when the coefficient matrix A is ill conditioned because it is difficult for them to get rid of the error in the small subspaces of A . Our method exploits this flaw, which acts as a sieve that captures a vector from this subspace.

The method sometimes converges very rapidly and sometimes very slowly. This is not related to the size of the problem and not to how ill conditioned it is, but to the distribution of singular values.

The rest of this paper is organized as follows. Section 2 surveys related work on condition number estimation. Section 3 describes the core of our algorithm. Section 4 explains how it works using mostly visualizations of numerical experiments that display the singular-vector concentration effect. Section 5 analyzes the unique stopping criteria that our method relies upon. The bulk of our experimental evidence is summarized in Section 6.

2 Related Work

The large singular value $\sigma_{\max}$ of A can be computed accurately using a bounded number of matrix-vector multiplications involving A and A^* . This can be done using the power method, for example, whose analysis for this application we explain below. The Lanczos method can reduce the number of matrix-vector products even further [11]. Random projection methods can also estimate $\sigma_{\max}(A)$ [6].

Estimating $\sigma_{\min}$ is computationally more challenging, because applying the pseudo-inverse is usually much harder than applying A itself. In general, existing random projection methods cannot efficiently estimate $\sigma_{\min}(A)$ unless a decomposition of A is computed, or A is low rank (or numerically low rank). If A is low rank, random projection methods can be used to estimate $\sigma_k(A)$, where k is the (numerical) rank [6].

The LINPACK condition-number estimator requires a triangular factorization of A (see Higham's

monograph [8, Chapter 15] for details on this and related estimators). The Gotsman–Toledo [5] and the Bischof et al. [2] condition-number estimators, which are specialized to sparse matrices, also require a triangular factorization. Estimators that require a triangular factorization are less expensive than the SVD, but they still cannot be applied to huge matrices.

The LAPACK condition-number estimator relies on repeated applications of the pseudo-inverses of A and A^* [7]. One way to apply them is using a factorization, but they can also be applied using an iterative solver. With an effective preconditioner, repeated applications of the pseudo-inverse may be less expensive than the method that we propose, but without one our method is less expensive. Kenny et al. [9] describe a way to estimate the condition number of a square matrix using a single application of the inverse to one or several vectors.

The spectral condition number measures the norm-wise sensitivity of matrix-vector products and linear systems to small perturbations in the inputs. There are methods that estimate more focused metrics, such as the sensitivity of individual components of the inputs or output [9]. Our method does not address this problem.

3 The Algorithm

This section describes our algorithm for estimating the condition number of A . A detailed pseudo-code description appears in Algorithm 1.

The algorithm starts by estimating $\sigma_{\max}(A)$ and a corresponding certificate vector using power iteration on A^*A . We perform enough iterations to estimate $\sigma_{\max}$ to within 10% with probability at least $1 - 10^{-12}$. Using a bound due to Klein and Lu [10, Section 4.4]², we find that given a relative error parameter ϵ and a failure probability parameter δ , if we perform

$$\left\lceil \frac{1}{\epsilon} \left(\ln(2n)^2 + \ln\left(\frac{1}{\epsilon\delta^2}\right) \right) \right\rceil$$

iterations, the relative error in our approximation is less than ϵ with probability at least $1 - \delta$. For the parameters $\epsilon = 10^{-1}$ and $\delta = 10^{-12}$, 1004 iterations suffice even for matrices with up to 10^9 columns. For $\epsilon = 1/3$ and $\delta = 10^{-12}$, only 298 iterations suffice for matrices with up to 10^9 columns. (The accuracy of the $\sigma_{\max}$ estimate in the power method is typically much higher than predicted by this bound, but the additional accuracy depends on the gap between the largest and second-largest singular values; the bound that we use makes no assumption on the gap.)

The main phase of the algorithm uses a slightly-enhanced LSQR iteration [13] to estimate $\sigma_{\min}$ and to produce a corresponding certificate vector. The algorithm first generates a uniformly-distributed random vector x^* on the unit sphere by first generating a vector $\hat{x}$ with normally-distributed independent random components, and setting $x^* = \hat{x}/\|\hat{x}\|$. The algorithm multiplies it by A to produce a consistent right-hand side $b = Ax^*$.

Now the algorithm runs LSQR on this b , using Paige and Saunders’s original formulation [13, pages 50–51]. LSQR minimizes $\|Ax - b\|$ iteratively using a Lanczos-type bidiagonalization procedure. It is mathematically equivalent to solving the normal equations $A^*Ax = A^*b$ using the Conjugate Gradients algorithm, but it behaves much better numerically.

²Note that the statement of Lemma 6 in [10] is incorrect; the proof shows the correct bound. Also, the discussion that follows the proof of the lemma repeats the error in the statement of the lemma.

Algorithm 1 The condition number estimation algorithm.

```

1: Input:  $A \in \mathbb{R}^{m \times n}$ 
2: Parameters and defaults:  $c_1$  ( $8\epsilon_{\text{machine}}$ ),  $c_2$  ( $10^{-3}$ ),  $c_3$  ( $64/\epsilon_{\text{machine}}$ ),  $c_4$  ( $\sqrt{\epsilon_{\text{machine}}}$ ) and  $c'_1$  ( $4\epsilon_{\text{machine}}$ )
3:
4: Estimate  $\hat{\sigma}_{\max} = \sigma_{\max}(A)$ , along with a certificate  $\hat{v}_{\max}$ , using power iteration.
5:  $\hat{\sigma}_{\min} = \hat{\sigma}_{\max}$ ,  $\hat{v}_{\min} = \hat{v}_{\max}$ 
6: Draw a random vector  $\hat{x} \in \mathbb{R}^n$  with independent normal entries
7:  $\tau \leftarrow \text{erf}^{-1}(c_2)/\|\hat{x}\|$ 
8:  $x^* \leftarrow \hat{x}/\|\hat{x}\|$ 
9:  $b \leftarrow Ax^*$ 
10:  $\beta^{(0)} \leftarrow \|b\|$ ,  $u^{(0)} \leftarrow b/\beta^{(0)}$ 
11:  $v^{(0)} \leftarrow Au^{(0)}$ ,  $\alpha^{(0)} \leftarrow \|v^{(0)}\|$ ,  $v^{(0)} \leftarrow v^{(0)}/\alpha^{(0)}$ 
12:  $w^{(0)} \leftarrow v^{(0)}$ 
13:  $x^{(0)} \leftarrow 0_{n \times 1}$ 
14:  $\bar{\phi}^{(0)} \leftarrow \beta^{(0)}$ ,  $\bar{\rho}^{(0)} \leftarrow \alpha$ 
15:  $T \leftarrow \infty$  {Value of  $T$  is set later.}
16: for  $t = 1, \dots, T$  do
17:    $u^{(t)} \leftarrow Av^{(t-1)} - \alpha u^{(t-1)}$ 
18:    $\beta^{(t)} \leftarrow \|u^{(t)}\|$ 
19:    $u^{(t)} \leftarrow u^{(t)}/\beta^{(t)}$ 
20:    $v^{(t)} \leftarrow A^*u^{(t)} - \beta^{(t)}v^{(t)}$ 
21:    $\alpha^{(t)} \leftarrow \|v^{(t)}\|$ 
22:    $v^{(t)} \leftarrow v^{(t)}/\alpha^{(t)}$ 
23:    $\rho^{(t)} \leftarrow \left\| \begin{pmatrix} \bar{\rho}^{(t-1)} & \beta^{(t)} \end{pmatrix} \right\|$ 
24:    $c^{(t)} \leftarrow \bar{\rho}^{(t-1)}/\rho^{(t)}$ ,  $s^{(t)} \leftarrow \beta^{(t)}/\rho^{(t)}$ 
25:    $\theta^{(t)} \leftarrow s^{(t)}\alpha^{(t)}$ ,  $\bar{\rho}^{(t)} \leftarrow -c^{(t)}\alpha^{(t)}$ 
26:    $\phi^{(t)} \leftarrow c^{(t)}\bar{\phi}^{(t-1)}$ ,  $\bar{\phi}^{(t)} \leftarrow s\bar{\phi}^{(t-1)}$ 
27:    $x^{(t)} \leftarrow x^{(t-1)} + (\phi^{(t)}/\rho^{(t)})w^{(t-1)}$ 
28:    $w^{(t)} \leftarrow v^{(t)} - (\theta^{(t)}/\rho^{(t)})w^{(t-1)}$ 
29:    $R_{tt}^{(t)} \leftarrow \rho^{(t)}$  {Only diagonal and superdiagonal of  $R$  are kept in memory}
30:   if  $t > 1$  set  $R_{t-1,t}^{(t)} \leftarrow \theta^{(t-1)}$ 
31:    $d^{(t)} \leftarrow x^* - x^{(t)}$ 
32:   if  $d^{(t)} = 0$  set  $\hat{\sigma}_{\min} \leftarrow \hat{\sigma}_{\max}$ ,  $\hat{v}_{\min} \leftarrow \hat{v}_{\max}$  and break for
     {For matrices with  $\kappa \neq 1$  the probability of getting  $d^{(t)} = 0$  is 0}.
33:   if  $\|Ad^{(t)}\| \leq \sigma_{\min}\|d^{(t)}\|$  then
34:      $\hat{\sigma}_{\min} \leftarrow \|Ad^{(t)}\|/\|d^{(t)}\|$ ,  $\hat{v}_{\min} \leftarrow d^{(t)}$ 
35:   end if
36:   if  $\hat{\sigma}_{\max}/\hat{\sigma}_{\min} \geq c_4$  then  $c_1 \leftarrow c'_1$ 
37:   if not converged ( $T = \infty$ ) and  $(\frac{\|Ad^{(t)}\|}{\hat{\sigma}_{\max}\|x^{(t)}\| + \|b\|} \leq c_1$  or  $\|d^{(t)}\| \leq \tau$  or  $\hat{\sigma}_{\max}/\hat{\sigma}_{\min} \geq c_3$ ) then
38:      $T \leftarrow \lceil 1.25t \rceil$ 
39:   end if
40: end for
41: Estimate  $\tilde{\sigma}_{\min} = \sigma_{\min}(R^{(T)})$ , using inverse power iteration
42:  $\tilde{\sigma}_{\min} \leftarrow \min(\tilde{\sigma}_{\min}, \hat{\sigma}_{\min})$ 
43:
44: return  $\hat{\sigma}_{\max}, \hat{\sigma}_{\min}, \hat{v}_{\max}$  and  $\hat{v}_{\min}, \tilde{\sigma}_{\min}$ 

```

Our algorithm adds a few steps to each LSQR iteration. At the end of each (standard) LSQR iteration, we have an updated approximate solution $x^{(t)}$ and an estimate of $\|r^{(t)}\| = \|Ax^{(t)} - b\|$, denoted by $\bar{\phi}^{(t)}$. This estimate of $\|r^{(t)}\|$ is mathematically correct but the equality of $\bar{\phi}^{(t)}$ and $\|r^{(t)}\|$ depends on the orthogonality of the Lanczos vectors, which lose orthogonality in floating point arithmetic as the algorithm progresses. Our algorithm also computes $d^{(t)} = x^* - x^{(t)}$ and $\|d^{(t)}\|$. We have

$$\begin{aligned}\|Ad^{(t)}\| &= \|A(x^* - x^{(t)})\| \\ &= \|b - Ax^{(t)}\| \\ &= \|r^{(t)}\| ,\end{aligned}$$

which in exact arithmetic equals $\bar{\phi}^{(t)}$, but to improve the robustness of the algorithm we compute $\|Ad^{(t)}\|$ explicitly. (In our numerical experiments we have found $\bar{\phi}^{(t)}$ to be an accurate estimate, but we prefer to avoid any reliance on the orthogonality of the Lanczos vectors in our algorithm.) We also compute $\|x^{(t)}\|$.

Next, the algorithm computes the ratio $\|Ad^{(t)}\|/\|d^{(t)}\|$, which like any Rayleigh quotient is an upper bound on $\sigma_{\min}$. If this ratio is the smallest we have seen so far, the algorithm treats it as an estimate of $\sigma_{\min}$ and stores both the ratio and the certificate $d^{(t)}$. When the algorithm terminates, it outputs the best ratio it has found and the corresponding certificate.

We use three stopping criteria. The first stopping criterion is the one used by the standard LSQR algorithm [13] for consistent systems:

$$\frac{\|r^{(t)}\|}{\hat{\sigma}_{\max} \|x^{(t)}\| + \|b\|} \leq c_1 , \quad (3.1)$$

where $\hat{\sigma}_{\max}$ is our estimate of $\|A\|$ and c_1 is a parameter that is set by default to $8\epsilon_{\text{machine}}$. It has been observed experimentally [3] that for consistent systems, as long as $c_1 = \Omega(\epsilon_{\text{machine}})$ this criterion will be eventually met in spite of the loss of orthogonality in the biorthogonalization process; however, the residual norm does not seem to decrease much below the value required to satisfy (3.1) [3], so a much smaller c_1 cannot be used.

In many cases our second stopping criterion, which is non-standard, will stop LSQR well before the residual is that small. This second condition is

$$\|d^{(t)}\| \leq \frac{\text{erf}^{-1}(c_2)}{\|\hat{x}\|} , \quad (3.2)$$

where erf^{-1} is the inverse error function (we use a numerical approximation of $\text{erf}^{-1}(c_2)$), and c_2 is a parameter that is set by default to 10^{-3} . We explain this stopping criterion and how the choice of c_2 affects the algorithm later, in Section 5.

The third stopping criterion is

$$\frac{\|Ad^{(t)}\|}{\|d^{(t)}\|} \geq c_3 , \quad (3.3)$$

where c_3 is a parameter that is set by default to $64/\epsilon_{\text{machine}}$. In other words, at this threshold we consider the matrix to be numerically rank deficient and we do not attempt to estimate the exact

condition number. This criterion is used in the standard LSQR algorithm [13] as a regularizing criterion.

To achieve good accuracy even for matrices that are terribly ill conditioned (condition number close to $1/\epsilon_{\text{machine}}$), the stopping criteria are refined in two additional ways:

1. If at some point we have

$$\frac{\|Ad^{(t)}\|}{\|d^{(t)}\|} \geq c_4,$$

where c_4 is a parameter that is set by default to $\sqrt{\epsilon_{\text{machine}}}$, we set c_1 (residual-based stopping threshold) to c'_1 , which is set by default to $4\epsilon_{\text{machine}}$.

2. Even when the method detects convergence using one of its three criteria (small residual, small error, and numerical rank deficiency), it keeps iterating. The number of extra iterations is one quarter of the number performed until convergence was detected. This rule is a heuristic that tries to improve the accuracy of the condition number estimate. The cost of this heuristic is obviously limited and it can be turned off by the user.

There is one more twist to the algorithm. The algorithm stores the matrix $R^{(t)}$, one of two bidiagonal matrices that LSQR incrementally constructs but normally discards. As in the symmetric Lanczos algorithm, the singular values of $R^{(t)}$ converge to the singular values of A . Once the algorithm terminates, we compute $\tilde{\sigma}_{\min} \approx \sigma_{\min}(R^{(t)})$; if it is smaller than the best $\|Ad^{(t)}\|/\|d^{(t)}\|$ estimate, we output both estimates. One estimate ($\tilde{\sigma}_{\min}$) is tighter, but it comes with no certificate vector; the other is looser, but comes with a certificate. Generating the certificate for the Lanczos estimate requires storing the Lanczos vectors or repeating the iterations, both of which we consider to be too expensive.

Storing $R^{(t)}$ and estimating $\sigma_{\min}(R^{(t)})$ is relatively inexpensive since $R^{(t)}$ is bidiagonal. We estimate it by running inverse iteration on $R^{(t)}$, again performing enough iterations to get to within 10% with very high probability. Since we use power-iteration, the error in $\tilde{\sigma}_{\min}$ is one sided: it is always the case that $\tilde{\sigma}_{\min} \geq \sigma_{\min}(R^{(t)})$ (because it is generated by a Rayleigh quotient). Also, $\sigma_{\min}(R^{(t)}) \geq \sigma_{\min}(A)$. Therefore, $\tilde{\sigma}_{\min}$ is also an upper bound on $\sigma_{\min}(A)$, not just an estimate.

4 Rationale

This section explains the rationale behind the method using several illustrative numerical experiments. All the experiments were done on 1000-by-400 matrices with real entries with prescribed singular values and random singular vectors.

Let us begin the discussion with a matrix that has 300 singular values that are distributed logarithmically between 10^{-3} and 10^{-2} , 10 values at 10^{-8} , and 90 at 1. Figure 4.1 shows the behavior of our method on one matrix generated with this spectrum. In the first 90 iterations or so the residual diminishes logarithmically; the norm of $x^{(t)} - x^*$ drops a bit but then stops dropping much. These two effects cause our estimate to also diminish roughly logarithmically. The Lanczos estimate ($\sigma_{\min}(R^{(t)})$) drops a bit initially but stagnates from iteration 30 or so. What is happening up to iteration 90 or so is that the Lanczos bidiagonalization resolves the singular values in the 10^{-3} -to- 10^{-2} cluster, while LSQR removes much of the projection of the corresponding singular

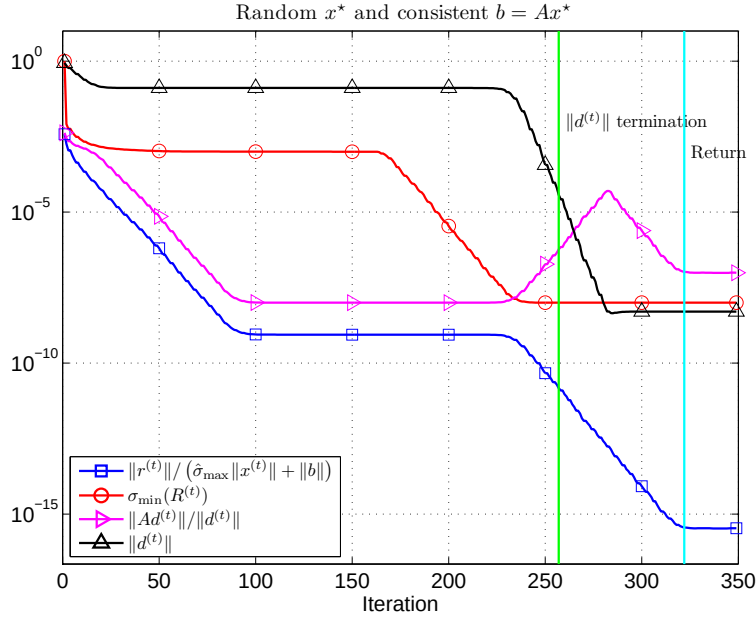


Figure 4.1: The behavior of the method on one matrix described in the text.

vectors from the residual and from the error. Around iteration 160 Lanczos has resolved enough of the spectrum in the 10^{-3} -to- 10^{-2} cluster and the small singular value of $R^{(t)}$ starts moving toward 10^{-8} . At that point, most of the remaining error consists of singular vectors corresponding to the singular value 10^{-8} , which causes our estimate to be accurate (to within 9 decimal digits!). The norm of $x^{(t)} - x^*$ is still large, because the error contains a significant component in the subspace associated with the 10^{-8} singular values. At this point, LSQR starts to resolve the error in this subspace, the residual starts decreasing again, the norm of $x^{(t)} - x^*$ starts decreasing, which causes our stopping criterion to be met.

Figure 4.2 visualizes the behavior described in the previous paragraph. We see that up to around iteration 50, the error associated with singular spaces associated with singular values other than 1 remains very large. From that point on to about iteration 150, the error in subspaces corresponding to values between 10^{-3} and 10^{-2} is resolved, but the error associated with the singular value 10^{-8} is still very large. This is a point where our method finds the small singular value and its certificate (the error). As LSQR starts to resolve the error in the 10^{-8} singular subspace, the errors in the 10^{-3} to 10^{-2} subspaces grows (perhaps due to loss of orthogonality) but they are reduced again later.

The method yielded similar results when the small singular value was moved down to 10^{-13} , with convergence after about 440 iterations and an estimate that is correct to within 5 decimal digits. The value $\sigma_{\min} = 10^{-13}$ is about the lower limit for which the $\|d^{(t)}\|$ stopping criterion is useful.

When A is rank deficient there is more than one solution to the system $Ax = b$. The solution x^* , which was generated randomly, has no special property that distinguishes it from other solutions (like minimum norm), so no least-squares solver can recover x^* . Therefore, it is unlikely $\|d^{(t)}\|$

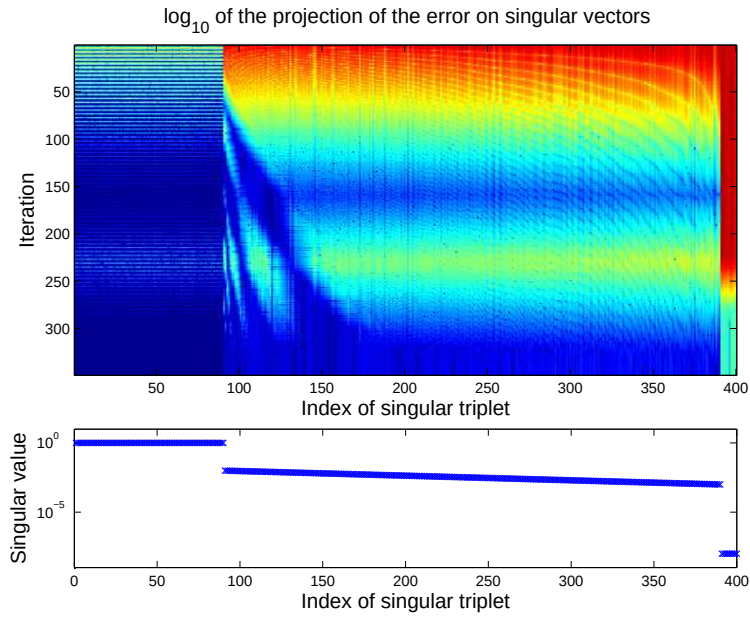


Figure 4.2: The projection of the forward error on the right singular vectors in the experiment shown in Figure 4.1. The bottom plot shows the singular values and the top image shows the projections. Blue represents values near $\epsilon_{\text{machine}}$, green represents values near $\sqrt{\epsilon_{\text{machine}}}$, and red represents values near 1.

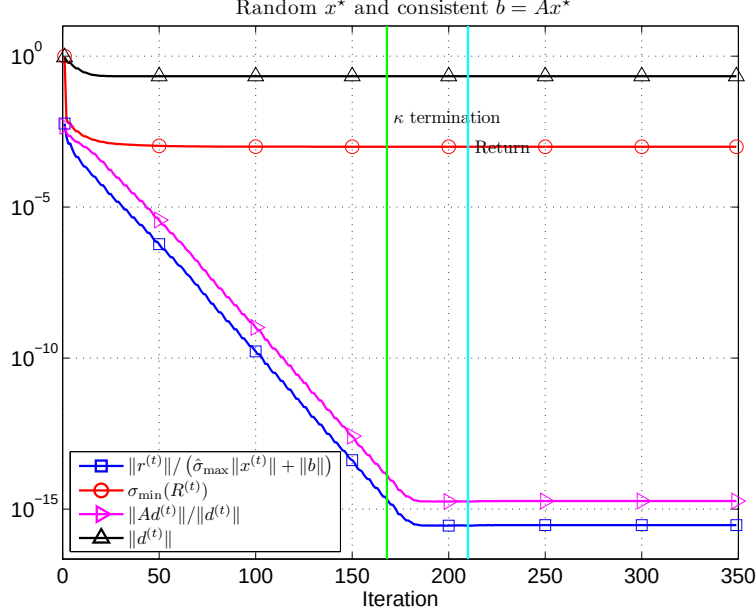


Figure 4.3: The behavior of the method on one matrix described in the text.

will become small enough to cause our method to stop. In this case, the method stops because the residual eventually becomes very small (close to $\epsilon_{\text{machine}}$) or because the estimated condition number becomes too big (stopping condition (3.3)). In Figure 4.3 we illustrate the behavior of the algorithm on a rank deficient matrix; the matrix has 10 singular values that are 10^{-16} (numerical zeros), 300 distributed logarithmically between 10^{-3} and 10^{-2} , and 90 at 1. The algorithm stopped because the condition number got too big, however a few iterations later it would have stopped because $\|r^{(t)}\|$ became too small (stopping condition (3.1)). Our estimate is not very accurate (around 1.8×10^{-15}). This still indicates to the user that the matrix is numerically rank deficient, although the algorithm cannot tell the user exactly how close to $\epsilon_{\text{machine}}^{-1}$ the condition number is (and certainly not whether it is higher). Stopping criteria (3.1) and (3.3), and the relatively-inaccurate estimates they yield, are used only when the matrix is close to rank deficiency (condition number of about 10^{14} or larger).

Can we estimate $\sigma_{\min}$ by minimizing $\|Ax - b\|$ with a random b , which with high probability is inconsistent if A has fewer columns than rows or is rank deficient? On some matrices, applying the pseudo inverse of A to such a b produces a minimizer with a norm that is larger than the norm of b by about a factor of $\sigma_{\min}^{-1}$. However, unless there is a large gap between the smallest singular values and the rest, the minimizer has a larger norm and the norms ratio fails to accurately estimate $\sigma_{\min}^{-1}$. Figure 4.4 shows the relative errors in this estimate for matrices whose singular values are distributed linearly between $\sigma_{\min}$ and 1. The errors are huge, sometimes by more than 3 orders of magnitude. This is not a particularly useful method. This method amounts to one half of inverse iteration on A^*A , so it is not surprising that it is not accurate; performing more iterations would make the method very reliable, but at the cost of applying the pseudo-inverse many times.

This estimator is clearly biased (the estimate is always larger than $\sigma_{\min}$); so is any fixed number of steps of inverse iteration. Kenny et al. [9] derive a unbiased estimator of this type for the Frobenius-

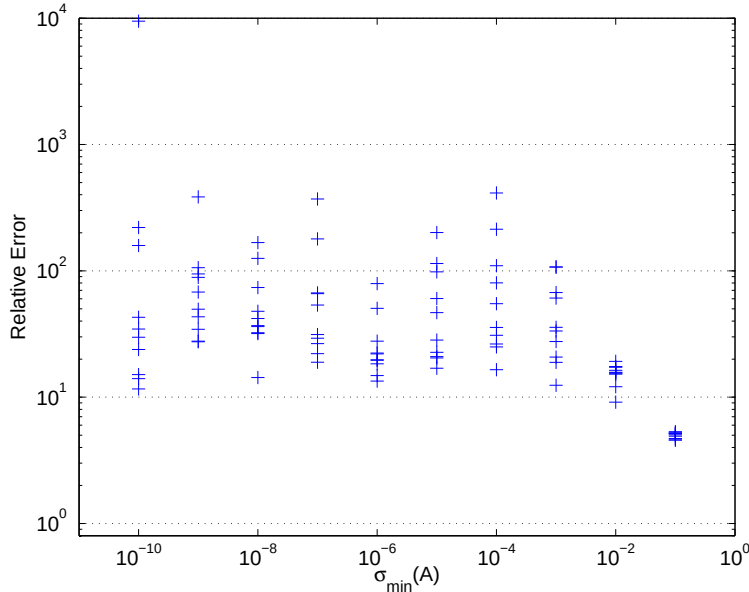


Figure 4.4: Estimating $\sigma_{\min}$ by $\|A^+b\|^{-1}$ for a unit-length random b with normal independent components.

norm condition number. To the best of our knowledge, this is not possible in the Euclidean norm.

Other distributions of the singular values lead to more accurate estimates in this method. But will this method work when the least-squares minimizer is an iterative method like LSQR? The following experiment suggests that the answer is no. The matrix used in the experiment has 50 singular values distributed logarithmically between 10^{-10} and 10^{-9} , 50 more distributed logarithmically between 10^{-1} and 1, and the rest are all 1. The results, presented in Figure 4.5, indicate that there is no good way to decide when to terminate LSQR when used in this way to estimate $\sigma_{\min}$. We obviously cannot rely on the residual approaching $\epsilon_{\text{machine}}$, because the problem is inconsistent. The original LSQR paper [13] suggests another stopping condition,

$$\frac{\|A^*r^{(t)}\|}{\hat{\sigma}_{\max}\|r^{(t)}\|} \leq c,$$

but our experiment shows that this ratio may fail to get close to $\epsilon_{\text{machine}}$. In our experiment the best local minimum is around 10^{-10} , six orders of magnitude larger than $\epsilon_{\text{machine}}$! Moreover, at that local minimum, around iteration 60, the estimate $\|b + r^{(t)}\|/\|x^{(t)}\|$ is still near 1, very far from $\sigma_{\min}$. The Lanczos estimate $\sigma_{\min}(R^{(t)})$ is also very inaccurate at that time. There does not appear to be a good way to decide when to stop the iterations and to report the best estimate seen so far.

On matrices with this singular value distribution, our method detects convergence after 2400–2500 iterations, returning a certified estimate of $\sigma_{\min}$ that is accurate to within 15–40% (the accuracy of the Lanczos estimate is better, with relative errors smaller than 10%). Figure 4.6 shows a typical run. The number of iterations is large, but the stopping criteria are robust.

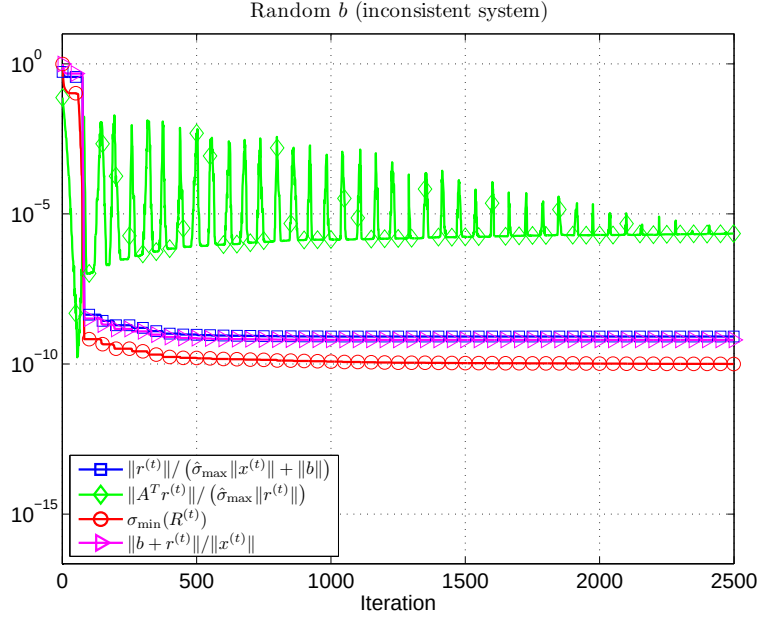


Figure 4.5: Running LSQR with an inconsistent right-hand-side b .

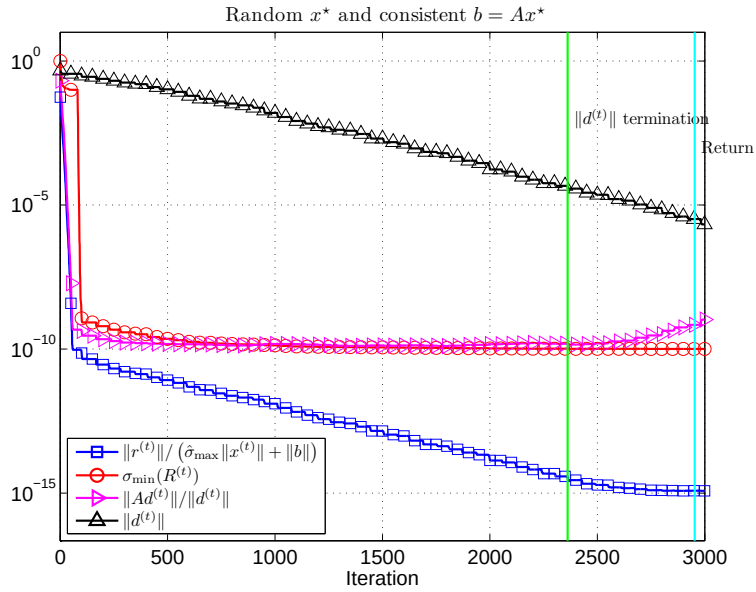


Figure 4.6: Running our method on the same matrix as in Figure 4.5.

5 Analysis of the Small-Error Stopping Criterion

Now that we understand how the method works, we can explain how to derive the small-error stopping criterion (3.2). Suppose that the smallest singular value of A is simple and that it is well separated from larger singular values. Let $x^* = \sum_{i=1}^n \alpha_i v_i$ be the initial vector represented in the basis of the right singular vectors of A . As LSQR progresses towards finding x^* it will tend initially to resolve components in the direction of the largest singular vectors. Since the v_n direction is not present in $x^{(0)} = 0$ we expect it to be not present during the initial iterations, i.e. $v_n^T x^{(t)} \approx 0$. This implies that we expect for the initial iterations t to have $|v_n^T(x^* - x^{(t)})| \approx |\alpha_n|$ so $\|x^* - x^{(t)}\| \geq |\alpha_n|$. Now, at some point in the iteration, the solution $x^{(t)}$ will be roughly $x^{(t)} \approx \sum_{i=1}^{n-1} \alpha_i v_i$, i.e. the error remains mostly in the direction of the small singular subspace, but the v_n direction is not present at all. At that point, $\|x^* - x^{(t)}\| \approx |\alpha_n|$. LSQR will now start to resolve that error at least partially and the norm of the error will decrease below $|\alpha_n|$. If we stop the iteration when $\|x^* - x^{(t)}\| \gg |\alpha_n|$, the error is unlikely to be a good estimate of a small singular vector. If we stop when $\|x^* - x^{(t)}\| \leq |\alpha_n|$ we will likely have a good estimate of a small singular value. Ideally, we want to stop immediately when $\|x^* - x^{(t)}\|$ drops below $|\alpha_n|$. Stopping later (when the error is much smaller than $|\alpha_n|$) does not do any harm, since we report the best Rayleigh quotient seen, but it does not improve the estimate by much.

We do not know $\alpha_n = v_n^T x^*$ (which is also a random variable), but we can do a test for which passing it implies that $\|x^* - x^{(t)}\| \leq |\alpha_n|$ with high probability. Recall that $x^* = \hat{x}/\|\hat{x}\|$ where $\hat{x}$ is a vector with normally-distributed independent random components. Let $\hat{x}^{(t)}$ be the LSQR estimates that we would have found if we run LSQR on $\hat{b} = A\hat{x}$, and let $\hat{\alpha}_n = v_n^T \hat{x}$. Clearly, $\hat{x}^{(t)} = \|\hat{x}\|x^{(t)}$ and $\hat{\alpha}_n = \|\hat{x}\|\alpha_n$, so $\|x^* - x^{(t)}\| \leq |\alpha_n|$ if and only if $\|\hat{x} - \hat{x}^{(t)}\| \leq |\hat{\alpha}_n|$. Therefore, if we find a value τ such that $\Pr(|\hat{\alpha}_n| \geq \tau) \geq 1 - c_2$ then if $\|\hat{x} - \hat{x}^{(t)}\| \leq \tau$ then $\|\hat{x} - \hat{x}^{(t)}\| \leq |\hat{\alpha}_n|$ (and $\|x^* - x^{(t)}\| \leq |\alpha_n|$) with probability of at least $1 - c_2$. The condition $\|\hat{x} - \hat{x}^{(t)}\| \leq \tau$ is equivalent to $\|x^* - x^{(t)}\| \leq \tau/\|\hat{x}\|$. Since $\|v_n\| = 1$ we have $\hat{\alpha}_n \sim N(0, 1)$. Therefore, for any $0 < c_2 < 1$

$$\Pr(|\hat{\alpha}_n| \geq \text{erf}^{-1}(c_2)) = 1 - c_2.$$

This immediately leads to the stopping criterion

$$\|x^* - x^{(t)}\| \leq \frac{\text{erf}^{-1}(c_2)}{\|\hat{x}\|}.$$

The choice of c_2 in the algorithm determines our confidence that $\|x^* - x^{(t)}\|$ dropped below $|\alpha_n|$. We use a default value of 10^{-3} , which implies a small probability of failure, but not a tiny one. The user can, of course, change the value if he needs higher confidence (in either case the error is one sided). Another approach is to use a much larger c_2 and to repeat the algorithm ℓ times (possibly in a single run, exploiting matrix-matrix multiplies), say $\ell = 3$. The probability that we succeed in at least one run is at least $1 - c_2^\ell$. For $c_2 = 10^{-2}$, say, setting $\ell = 3$ or so should suffice. In our experience it is better to make c_2 smaller than to set $\ell > 1$, but we did not do a formal analysis of this issue.

If the small singular value is multiple (associated with a singular subspace of dimension $k > 1$), our situation is even better, because we can stop when $x^* - x \approx \sum_{i=n-k+1}^n \alpha_i v_i$, when $\|x^* - x\| \approx \sqrt{\alpha_{n-k+1}^2 + \dots + \alpha_n^2}$, which is even more likely to be larger than our stopping criterion.

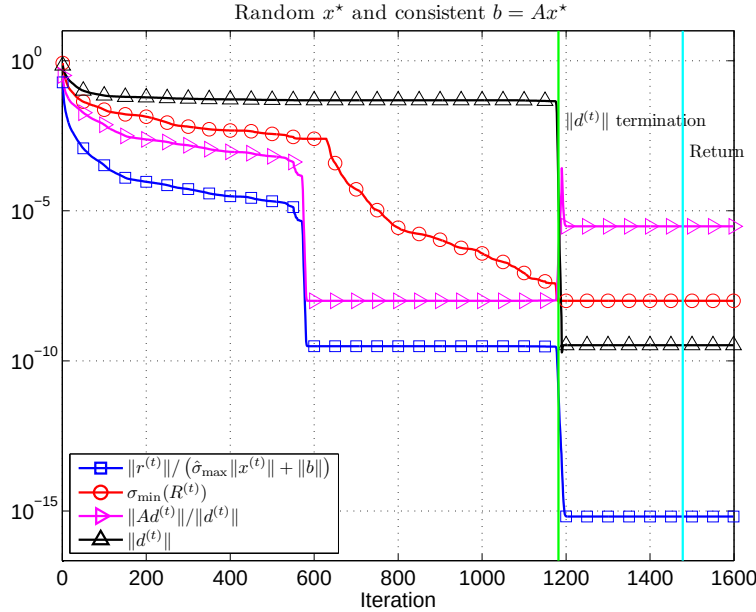


Figure 6.1: Singular values are distributed linearly from 10^{-8} up to 1.

When the small singular value is not well separated, the stopping criterion is still sound but the Rayleigh quotient estimate we obtain is not as accurate, because in such cases $x^* - x$ tends to be a linear combination of singular vectors corresponding to several singular values. These singular values are all small, but they are not exactly the same, thereby pulling the Rayleigh quotient up a bit.

6 Additional Experiments

6.1 Additional Illustrative Examples

In Figure 6.1 all the singular values are distributed linearly from 10^{-8} up to 1. Convergence is fairly slow. The gap between $\sigma_{\min} = \sigma_{400} = 10^{-8}$ and σ_{399} is relatively large, around $\frac{1}{400}$, so $\sigma_{\min}$ is computed accurately. When many singular values are distributed logarithmically or nearly so, convergence is very slow and the small relative gap between $\sigma_{\min}$ and the next-larger singular values causes the method to return a less accurate estimate. Figure 6.2 plots the convergence when 200 singular values are distributed logarithmically between 10^{-3} and 1 and the rest are at 1. We do not see a period of stagnation during which the error is a good estimate of $v_{\min}$. The certified estimate is only accurate to within 31% and the Lanczos estimate to within 10% (much worse than when the small singular value is well separated from the rest).

LSQR might have several periods of stagnation. This happens when the spectrum contains several well-separated clusters. Figure 6.3 plots the convergence when the matrix has a multiple singular value at 10^{-10} , a multiple singular value at 10^{-7} (both with multiplicity 10), 300 singular values that are distributed logarithmically between 10^{-3} and 10^{-2} , and the rest are at 1. We see

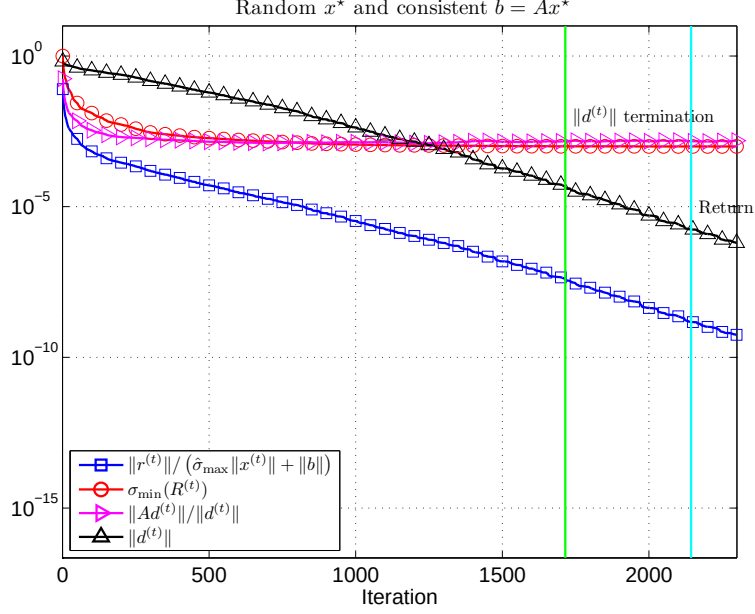


Figure 6.2: 200 singular values are distributed logarithmically from 10^{-3} up to 1, and the rest are at 1.

multiple stagnation periods of both the residual, the error, the Lanczos estimate, and our certified estimate.

6.2 Experiments on Large Structured Random Matrices

The next set of experiments was performed on sparse matrices that motivated this project. These matrices have exactly 3 nonzeros per column, where the location of the nonzeros is random and uniform and their values are $+1$ or -1 with equal independent probabilities. These type of matrices arise in trying to simulate the evolution of random 2-dimensional complexes in various stochastic models [1]. Such m -by- n matrices tend to be well conditioned when $n < 0.9m$ and rank deficient when $n > 0.95m$. Figure 6.4 shows that the method converges quite quickly even on large matrices in both the well conditioned and the rank deficient cases. On smaller matrices of this type we were able to assess the accuracy of the method. For $m = 1000$, $n = 900$ yielded a relative error of 22% (the Lanczos estimate was off by 78%), and $n = 450$ yielded a relative error of 41% (the Lanczos estimate was off by 18%). Problems of this type of size $m = 1,000,000$ required similar number of iterations and were easily solved on a laptop. It is worth noting that due to the random structure of the non-zero pattern, it is likely that factorization based condition number estimators will be very slow when applied to this type of matrices.

6.3 Experiments on Many Real-World Matrices

We ran both a dense SVD and our method on all the matrices from Tim Davis's sparse matrix collection [4] for which $mn^2 < 256 \times 10^9$. Our method converged in 100,000 iterations or less on

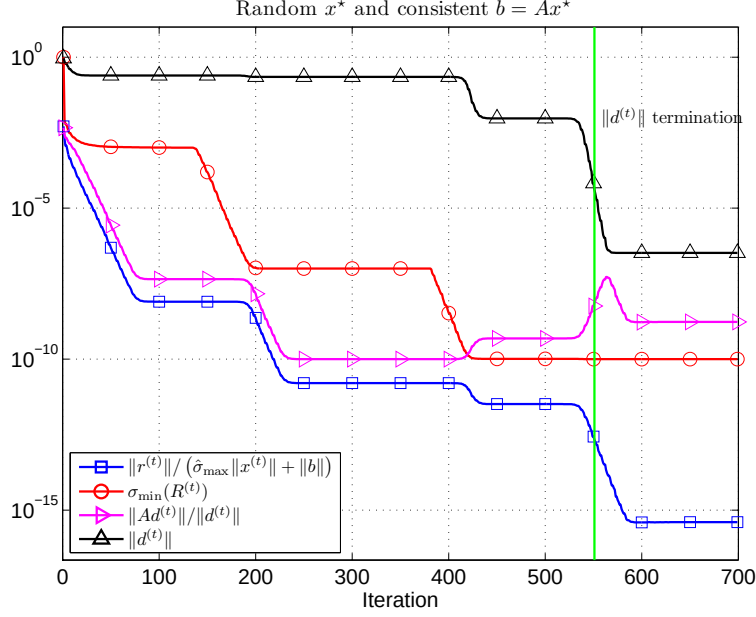


Figure 6.3: 200 singular values are distributed logarithmically from 10^{-3} up to 1, and the rest are at 1.

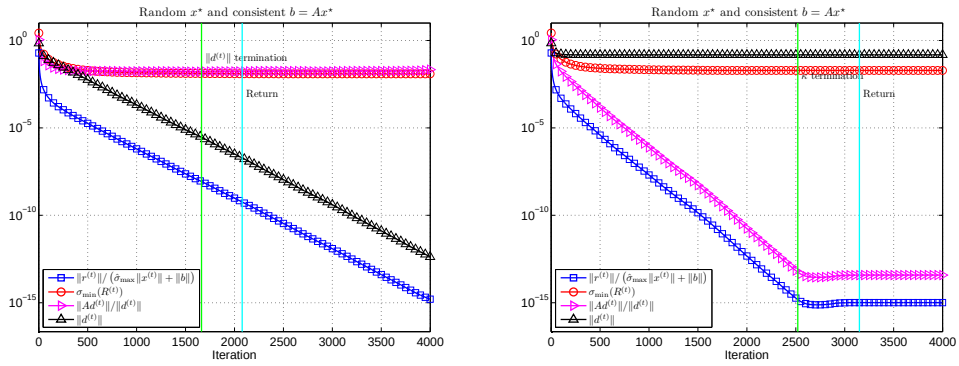


Figure 6.4: Random matrices with 3 nonzeros per row. On the left we see the convergence on a 100,000-by-90,000 matrix and on the right convergence on a 100,000-by-95,000 matrix.

	m	n	time (s)	iterations	κ (est.)
rajat10	30202	30202	43	5219	1.2e+03
flower_7_4	67593	27693	4	231	1.6e+01
flower_8_4	125361	55081	15	537	2.2e+13
wheel_601	902103	723605	1278	5260	1.3e+14
Franz11	47104	30144	1.4	59	3.3e+15
lp_ken_18	154699	105127	59	1836	2.5e+14
lp_pds_20	108175	33874	13	697	1.2e+14

Table 1: Large real-world matrices whose condition number was successfully computed by our method.

1024 out of the 1468 matrices in this category.

Out of the 1468 matrices, 404 had condition number $64/\epsilon_{\text{machine}} \approx 7 \times 10^{13}$ or larger. Our method converged on 278 out of them, delivering condition number estimates of 5×10^{11} or larger. In other words, on all the matrices that were close to rank deficiency, our method detected that the condition number is large, but in some cases it underestimated the actual condition number.

On matrices with condition number smaller than $64/\epsilon_{\text{machine}}$, our method always estimated the condition number to within a relative error of 24% or less.

We ran the method again on some of the matrices on which it failed to converge in 100,000 iterations, allowing the method to run longer. It converged in all cases. For example, on **nos1**, the method detected convergence after 169,791 iterations. The $\sigma_{\min}$ estimate it returned was actually from iteration 90,173, meaning that at iteration 100,000 it actually converged, but the algorithm was not yet able to detect convergence. We note that **nos1** is a square matrix of dimension 237; the method can be slow even on small matrices.

The running time of our method obviously varies a lot and is not easy to characterize. But on large matrices it is often much faster than a dense SVD. On one matrix in our test set, **bips98_606** (a square matrix of dimension 7135), our method was more than 550 times faster than a dense SVD, even though the dense SVD routine used all 4 cores in the Intel Core i7 machine where as our method used only one. The machine had 16GB of RAM and the SVD computation did not perform any paging activity.

6.4 Experiments on Large Real-World Matrices

We ran the algorithm on a few very large matrices from the same matrix collection. As on the smaller matrices, the method sometimes converged but sometimes it exceeded the maximal number of iterations (up to 1,000,000). Table 1 shows the statistics of successful runs; they indicate that when the singular spectrum is clustered, the method works well even on very large matrices.

7 Summary

We have presented an adaptation of LSQR to the estimation of the condition number of matrices.

Our method is yet another tool in the condition-number estimation toolbox. It relies almost solely on matrix-vector multiplications, so it can be applied to very large sparse matrices. It does

not require much memory, and it is at least as fast as a single application of un-preconditioned LSQR to solve a least-squares problem. The method is reliable in the sense that it never returns an overestimate of the condition number.

In many cases, the method is orders-of-magnitude faster than competing methods, especially if A is large and has no sparse triangular factorization.

However, the performance of the method depends on the distribution of the singular values of A , and some distributions lead to very slow convergence. In such cases, the method still provides a lower bound on the condition number, but it may be loose. In such cases, methods that are based on an orthogonal or triangular factorizations or on preconditioned iterative solvers may be faster.

Our method is primarily based on one key insight: that the forward error in LSQR tends to converge to an approximate singular vector associated with $\sigma_{\min}$. This property of LSQR and related Krylov-subspace solvers is normally seen as a deficiency (because it slows down the convergence to the minimizer), but it turns out to be beneficial for condition-number estimation.

Acknowledgments This research was supported in part by grant 1045/09 from the Israel Science Foundation (founded by the Israel Academy of Sciences and Humanities) and by grant 2010231 from the US-Israel Binational Science Foundation.

References

- [1] Lior Aronshtam, Nathan Linial, Tomasz Łuczak, and Roy Meshulam. Collapsibility and vanishing of top homology in random simplicial complexes. *Discrete & Computational Geometry*, pages 1–18, 2012.
- [2] Christian H. Bischof, John G. Lewis, and Daniel J. Pierce. Incremental condition estimation for sparse matrices. *SIAM Journal on Matrix Analysis and Applications*, 11(4):644–659, 1990.
- [3] X. Chang, C. Paige, and D. Tittle-Peloquin. Stopping criteria for the iterative solution of linear least squares problems. *SIAM Journal on Matrix Analysis and Applications*, 31(2):831–852, 2009.
- [4] Timothy A. Davis and Yifan Hu. The University of Florida Sparse Matrix Collection. *ACM Transactions on Mathematical Software*, 38(1):1:1–1:25, November 2011.
- [5] Craig Gotsman and Sivan Toledo. On the computation of null spaces of sparse rectangular matrices. *SIAM Journal on Matrix Analysis and Applications*, 30:445–463, 2008.
- [6] N. Halko, P. G. Martinsson, and J. A. Tropp. Finding structure with randomness: Probabilistic algorithms for constructing approximate matrix decompositions. *SIAM Review*, 53(2):217–288, 2011.
- [7] Nicholas J. Higham. FORTRAN codes for estimating the one-norm of a real or complex matrix, with applications to condition estimation. *ACM Trans. Math. Softw.*, 14(4):381–396, December 1988.
- [8] Nicholas J. Higham. *Accuracy and Stability of Numerical Algorithms*. SIAM, 2nd edition, 2002.

- [9] C. S. Kenney, A. J. Laub, and M. S. Reese. Statistical condition estimation for linear systems. *SIAM Journal on Scientific Computing*, 19(2):566–583, 1998.
- [10] Philip Klein and Hsueh-I Lu. Efficient approximation algorithms for semidefinite programs arising from MAX CUT and COLORING. In *Proceedings of the 28th annual ACM Symposium on Theory of Computing*, pages 338–347, 1996.
- [11] J. Kuczyński and H. Woźniakowski. Estimating the largest eigenvalue by the power and Lanczos algorithms with a random start. *SIAM Journal on Matrix Analysis and Applications*, 13(4):1094–1122, 1992.
- [12] R. B. Lehoucq, D. C. Sorensen, and C. Yang. *ARPACK User's Guide*. SIAM, 1998.
- [13] Christopher C. Paige and Michael A. Saunders. LSQR: An algorithm for sparse linear equations and sparse least squares. *ACM Transactions on Mathematical Software*, 8:43–71, 1982.